



CITY OF BISHOP

377 West Line Street - Bishop, California 93514
Post Office Box 1236 - Bishop, California 93515
760-873-8458 publicworks@ca-bishop.us
www.ca-bishop.us

Addendum 1

17 October 2014

Warren Street Improvement Project

This addendum changes the 2 October 2014 Bidding Information and Contract Documents for this project.

1. Replace pages 5, 6, and 7 of 35 of the Bid Form with the attached pages. The attached pages correct an error in the unit of measurement for Area Drain and in the quantities of Pavement Marking and Pavement Stripe.
2. Add the following to the provisions to Bid Item 22, Street Light:

"Street light shall use Antique Street Lamps products or approved equals. Banner arm bracket kit shall be 2BAB-24-B-4-ANDB and planter arm bracket kit shall conform to the attached drawing and shall have a dark bronze finish."

David Grah
Director of Public Works

Bid Form: Option 1**Storm drain improvements: 50+03 on, excluding inlet at 50+72 left.****Street improvements: Warren Street 11+44 to 20+58 and all Church Street, Academy Avenue, and Pine Street improvements.**

Item	Quantity	Unit	Description	Unit Price	Total Item Price
1	1	LS	Mobilization		
2	1	LS	Erosion Control		
3	1	LS	Traffic Control		
4	9	EA	Remove Tree		
5	170	LF	6" and 8" Storm Drain Line		
6	503	LF	12" Storm Drain Line		
7	1286	LF	18" Storm Drain Line		
8	16	EA	Curb Inlet		
9	1	EA	Stormwater Separator		
10	2	EA	Manhole		
11	20735	SF	Sidewalk		
12	2472	LF	Curb (A2-6)		
13	2270	LF	Curb (A1-6)		
14	13	EA	Curb Ramp		
15	5588	SF	Roadway Concrete		
16	4955	SF	Driveway		
17	4	EA	Area Drain		
18	60	EA	Tree		
19	18	EA	Tree Grate		
20	30	EA	Landscape Boulder		
21	3	EA	Concrete Feature		
22	29	EA	Street Light		
23	1	LS	Irrigation System		
24	1426	CY	Cement Treated Base		
25	1263	TON	Hot Mix Asphalt		
26	108	SF	Pavement Marking		
27	1,580	LF	Pavement Stripe		
28	16	EA	Utility Cover		
				Total Bid	

CY is cubic yard; EA is each; LF is linear foot; LS is lump sum; SF is square foot

Bid Form: Option 2

Storm drain improvements: 50+03 on, excluding inlet at 50+72 left.

Street improvements as follows: Warren Street 11+44 to 19+75 and all Church Street and Academy Avenue improvements.

Item	Quantity	Unit	Description	Unit Price	Total Item Price
1	1	LS	Mobilization		
2	1	LS	Erosion Control		
3	1	LS	Traffic Control		
4	9	EA	Remove Tree		
5	170	LF	6" and 8" Storm Drain Line		
6	503	LF	12" Storm Drain Line		
7	1286	LF	18" Storm Drain Line		
8	16	EA	Curb Inlet		
9	1	EA	Stormwater Separator		
10	2	EA	Manhole		
11	17210	SF	Sidewalk		
12	1797	LF	Curb (A2-6)		
13	2007	LF	Curb (A1-6)		
14	9	EA	Curb Ramp		
15	4210	SF	Roadway Concrete		
16	3564	SF	Driveway		
17	4	EA	Area Drain		
18	52	EA	Tree		
19	18	EA	Tree Grate		
20	30	EA	Landscape Boulder		
21	3	EA	Concrete Feature		
22	22	EA	Street Light		
23	1	LS	Irrigation System		
24	1159	CY	Cement Treated Base		
25	1026	TON	Hot Mix Asphalt		
26	68	SF	Pavement Marking		
27	1,580	LF	Pavement Stripe		
28	12	EA	Utility Cover		
				Total Bid	

CY is cubic yard; EA is each; LF is linear foot; LS is lump sum; SF is square foot

Bid Form: Option 3

Storm drain improvements: 50+03 on, excluding inlet at 50+72 left.

Street improvements as follows: Warren Street 11+44 to 17+85 and all Church Street and Academy Avenue improvements.


Item	Quantity	Unit	Description	Unit Price	Total Item Price
1	1	LS	Mobilization		
2	1	LS	Erosion Control		
3	1	LS	Traffic Control		
4	7	EA	Remove Tree		
5	170	LF	6" and 8" Storm Drain Line		
6	503	LF	12" Storm Drain Line		
7	1286	LF	18" Storm Drain Line		
8	16	EA	Curb Inlet		
9	1	EA	Stormwater Separator		
10	2	EA	Manhole		
11	14515	SF	Sidewalk		
12	1445	LF	Curb (A2-6)		
13	2007	LF	Curb (A1-6)		
14	9	EA	Curb Ramp		
15	4210	SF	Roadway Concrete		
16	2750	SF	Driveway		
17	4	EA	Area Drain		
18	44	EA	Tree		
19	10	EA	Tree Grate		
20	30	EA	Landscape Boulder		
21	3	EA	Concrete Feature		
22	20	EA	Street Light		
23	1	LS	Irrigation System		
24	998	CY	Cement Treated Base		
25	884	TON	Hot Mix Asphalt		
26	68	SF	Pavement Marking		
27	1,580	LF	Pavement Stripe		
28	12	EA	Utility Cover		
				Total Bid	

CY is cubic yard; EA is each; LF is linear foot; LS is lump sum; SF is square foot

MATERIAL LIST

Item	Qty	Part #	Ref #	Description	Mat'l
1	1		118276	PBA XXXX4 AL WELDMENT	AL
2	1		106907	Finial chart 1" pipe banner arm	CA
3	3	SC-10322		SCRW 1/4-20X0.375" SOC SET NYLOK PATCH SS	SS
4	4	SC-10218		SCRW 3/8-16X1" BTN HD SOC CAP SS	SS
5	1	SC-10543		SCRW 3/8-16x1" EYE BOLT W/SHOULDER (3" THREAD)	SS
6	4	WA-10034		WSHR 3/8" SPLIT LOCK	SS
7	2	WA-10003		WSHR 3/8" FLAT SS	SS
8	2	NU-10023		NUT 3/8-16 SS	SS

CABLE ATTACHED TO POLE

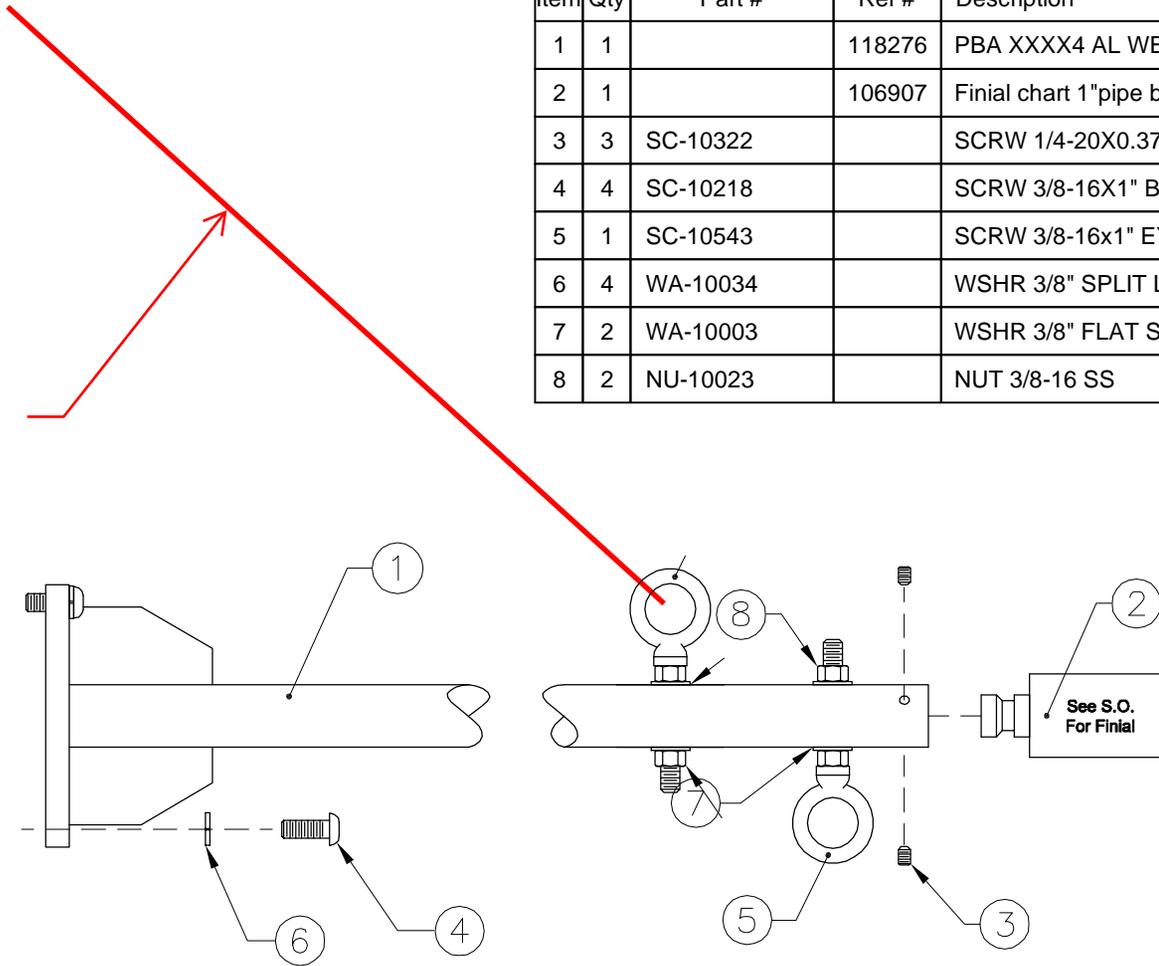

-	11/8/06	NEW DRAWING (REF 602399)	SA	
Rev.#	Date	Rev. Description	Drwg	Appvd
Title:		ANTIQUE Street Lamps		
		2011-B W. Rundberg Lane (512) 977-8444 Austin, Texas 78758-5946 Fax (512) 977-9622		
Title: PBA XXX4 AL ASSEMBLY				
Date:	Scale:	Dwg Size:	Page #:	Dwg Type:
11/8/06	NTS	A	1 of 1	M
				Dwg #:
				602399
				Rev:
				-